
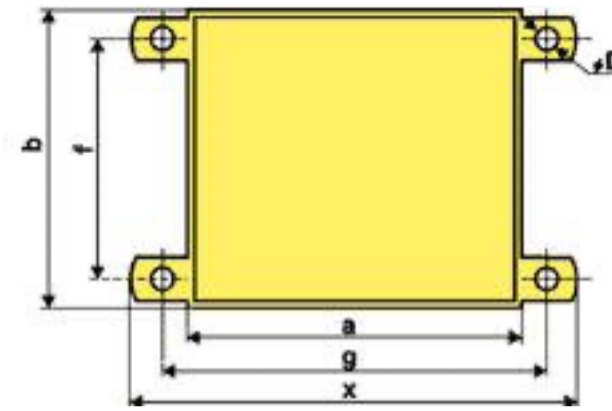


Transformers in PVC box

Transformers in PVC box IP54

Transformers in durable PVC box provide electrical isolation for harsh conditions. The PVC box provides protection against moisture, dust and corrosion.

Type range: TR 9600/60 to TR 9600/300.

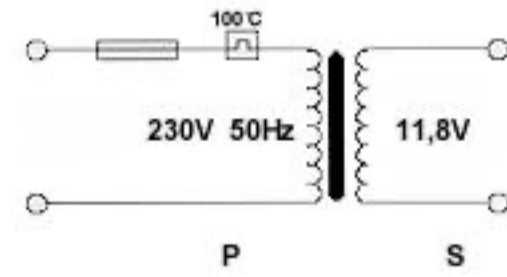

	TYPE	CAPACITY [VA]	CAPACITY [EI]	a [mm]	b [mm]	HEIGHT [mm]	x [mm]	g [mm]	f [mm]	D [mm]
Transformer	TR9600/60	20	60/30	63,6	53,6	57,3	81,2	72,5	43,5	4,2
Transformer	TR9600/60	60	75/32,7	78,7	66,2	63,8	100	90	52,5	4,2
Transformer	TR9600/105	105	84/43,5	88,1	74,1	76,5	107,5	97,5	60	4,2
Transformer	TR9600/200	150	96/45,7	100,7	84,7	84,4	129,5	115	70	6,2
Transformer	TR9600/200	200	96/59,7	100,7	84,7	98,4	129,5	115	70	6,2
Transformer	TR9600/300	300	120/50	126,8	106,7	109	176,8	150,5	85	8,5
Transformer	TR9600/300	400	120/73	126,8	106,7	129	176,8	150,5	85	8,5
Transformer	TR9600/300	500	120/73	126,8	106,7	129	176,8	150,5	85	8,5
Transformer	TR9600/300	600	120/80	126,8	106,7	129	176,8	150,5	85	8,5

THERMAL CLASS:	E 120°C
SHORT-CIRCUIT RESISTANCE:	CONDITIONALLY SHORT-CIRCUIT RESISTANT
PROTECTION CLASS:	II.
PROTECTION:	IP54
PROTECTION:	THERMAL FUSE REVERSIBLE 120°C
VOLTAGE WITHSTAND:	4,75kV
OUTLETS:	Mains cord or terminal block
IMPREGNATION:	Polyurethane
AMBIENT TEMPERATURE:	ta40