
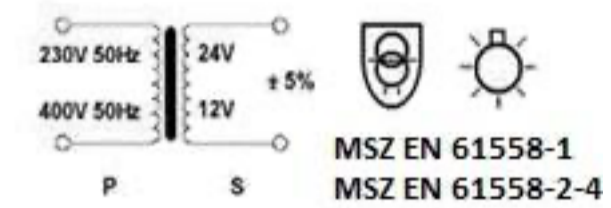
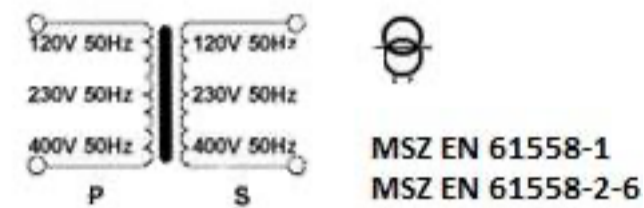


Safety protection and protection isolating transformers for DIN bar or panel mounting

DIN rail mountable transformer 35mm

Safety protection and protection isolating transformers for DIN bar or panel mounting Transformers for DIN bar are mainly used in switchboards. High protection and modularity are their advantages.

The performance range is from 60 to 400VA.

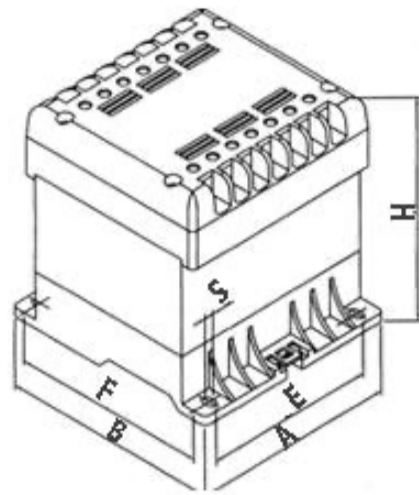

Type	Capacity [VA]	A [mm]	B [mm]	H [mm]	E [mm]	F [mm]	S [mm]	Weight [kg]
Transformer TR9402DIN	60	90	106	87	69	90	4,5	1,1
Transformer TR9403DIN	80	90	106	96	69	90	4,5	1,6
Transformer TR9401DIN	100	90	106	106	69	90	4,5	1,9
Transformer TR9404DIN	125	90	106	116	69	90	4,5	2,3
Transformer TR9409DIN	250	126	136	117	96	121	5,5	4,4
Transformer TR9409DIN	315	126	136	127	96	121	5,5	5,3
Transformer TR9409DIN	400	126	136	117	96	121	5,5	5,3

THERMAL CLASS:	E120°C
VOLTAGE WITHSTAND:	PRI/SEC/CORE 4,75kV 50Hz
SHORT-CIRCUIT RESISTANCE:	NOT SHORT-CIRCUIT RESISTANT
TEMPERATURE RISE (HEAT RUN):	max. 85°C
PROTECTION CLASS:	II.
PROTECTION:	IP20
AMBIENT TEMPERATURE:	ta40